
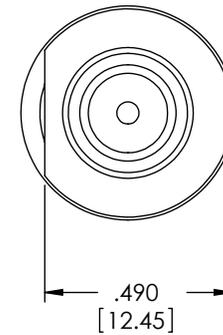
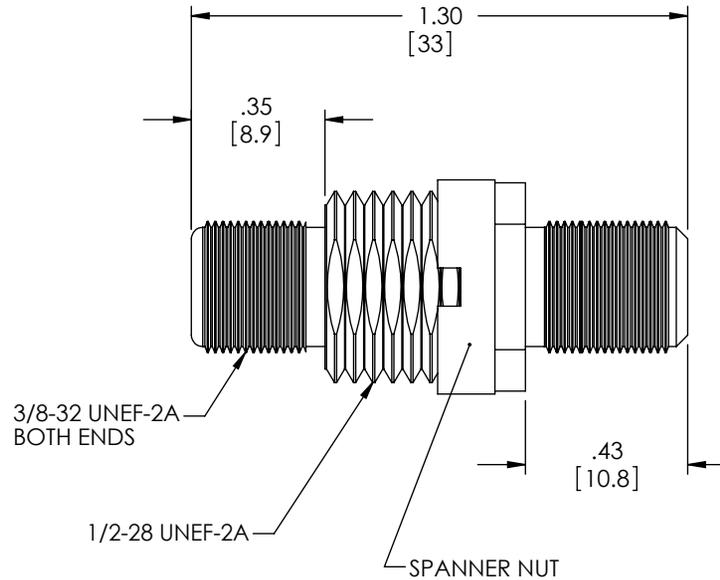


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	3/11/10	D.GRIFFIN
-	-	-	-
-	-	-	-
-	-	-	-

DESCRIPTION	MATERIAL	FINISH
BODY	ZINC	NICKEL
CONTACT	PHOSPHOR BRONZE	GOLD
INSULATOR	PE	-
SPANNER NUT	BRASS	NICKEL

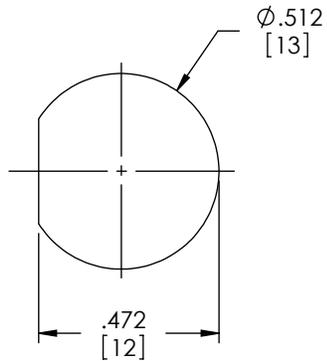

NOTES:

ELECTRICAL:

TERMINATOR RESISTOR: 75 ohms
RESISTOR POWER RATING: 1/4 WATT.

MISCELLANEOUS:

F-SERIES PLUGS MUST BE ENGAGED TO DISABLE TERMINATING RESISTOR BETWEEN OUTER SHELL AND CENTER CONDUCTOR. TERMINATING RESISTOR IS INTENDED TO TERMINATE CABLES FOR SIGNAL LEVEL ENERGY ONLY.

COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPEC. PS-0031.

ALL DIMENSIONS ARE FOR REFERENCE ONLY

RoHS Compliant ✓

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 .XX = ±.02 .XXX = ±.005	APPROVALS DRAWN BY D. CASTRO CHECKED BY D. FRISIELLO APPROVED BY P. MCNEIL	DATE 3/8/10 3/8/10 3/8/10	45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		
PROJECTION 	COLOR VARIATIONS MAY OCCUR	SIZE A	FSCM NO. 43321
		DWG. NO. ATERM-FF	REV. A
		SCALE: NONE	CAD FILE: ATERM-FF.SLDDRW
		SHEET 1 OF 1	