
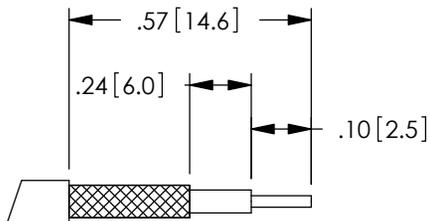
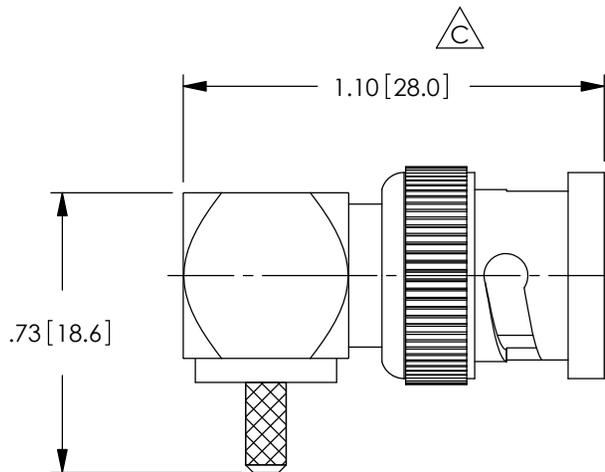




THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	3/12/09	D.GRIFFIN
B	ECN 4567: CHANGE CRIMP SIZE FROM .178 TO .128, NEW FORMAT	2/18/10	D.FRISIELLO
C	ECN 7017: REVISED PER VENDOR SPEC, NEW FORMAT	8/15/13	D.FRISIELLO

DESCRIPTION	MATERIAL	FINISH
CONNECTOR BODY	BRASS	NICKEL PLATING
CONTACT PIN	BRASS	GOLD FLASH
FERRULE	BRASS	NICKEL PLATING
COUPLING NUT	ZINC ALLOY	NICKEL PLATING
SPRING WASHER	STAINLESS STEEL	-
INSULATOR	PTFE	-
GASKET	SILICONE RUBBER	-



RECOMMENDED CABLE STRIPPING

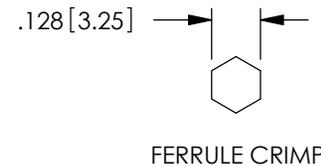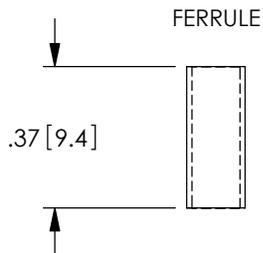

FERRULE CRIMP

NOTES:

MISCELLANEOUS:
IMPEDANCE: 50 OHMS.

FOR USE WITH RG174, RG188, AND RG316 CABLE.

ALL DIMENSIONS ARE FOR REFERENCE ONLY.

COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:
ROHS, CE

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: $\leq 12 [305] = +1 [25] / -0$ $> 12 [305] \leq 60 [1524] = +2 [51] / -0$ $> 60 [1524] \leq 120 [3048] = +4 [102] / -0$ $> 120 [3048] \leq 300 [7620] = +6 [152] / -0$ $> 300 [7620] = +5\% / -0\%$	APPROVALS	DATE		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	DRAWN BY D.FRISIELLO	2/23/09		
ALL OTHER DIMENSIONAL TOLERANCES: .X = $\pm .2 [5.08]$.XX = $\pm .02 [1.51]$.XXX = $\pm .005 [1.13]$	CHECKED BY D.CASTRO	2/23/09	CATEGORY COAXIAL	
	APPROVED BY D.DOLCE	2/23/09	PRODUCT DESCRIPTION 50 OHM RIGHT ANGLE BNC PLUG	
PROJECTION 	COLOR VARIATIONS MAY OCCUR	SIZE A	FSCM NO. 43321	DWG. NO. BAC546
1A805-046		SCALE: NONE	CAD FILE: BAC546.SLDDRW	SHEET 1 OF 1