
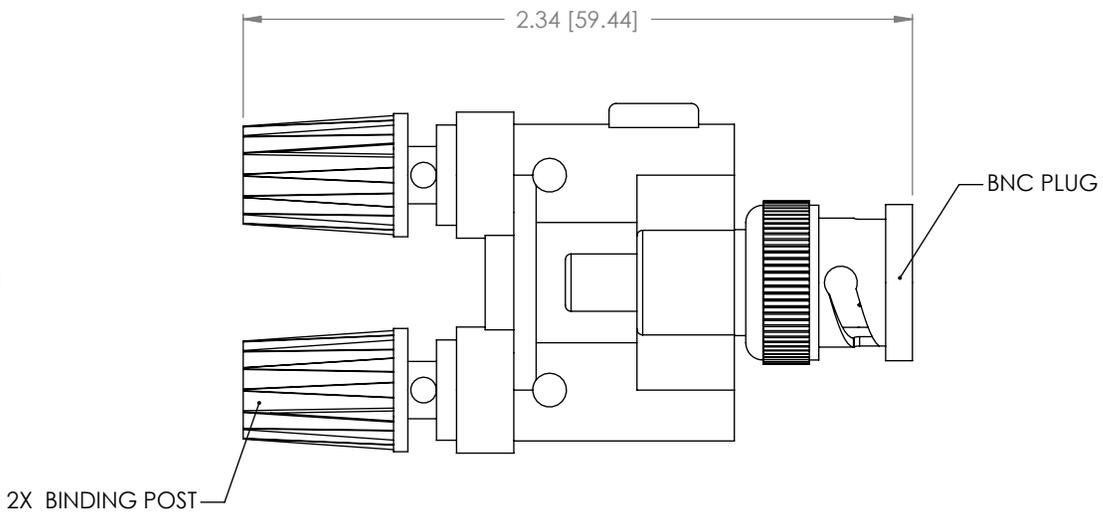


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	CHANGED BY
A	INITIAL RELEASE	11/21/2002	MCCORMICK
B	ECN# 1605 ADDED COMPONENT SPECIFICATION TABLE	12/29/03	MCCORMICK
C	ECN 3177: UPDATE DWG FORMAT	1/29/08	D.GRIFFIN

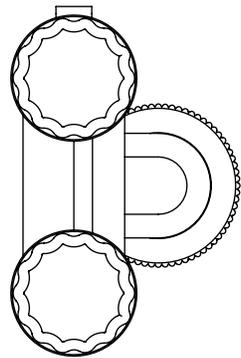

NOTES:


MATERIAL:
 BODY: POLYETHYLENE
 PLUGS: COPPER
 CENTER CONTACT: COPPER
 INSULATOR: ACETAL

FINISH:
 PLUGS: NICKEL PLATE
 BNC SHELL: NICKEL PLATE

MISCELLANEOUS:
 CONTACT RESISTANCE: <20MEG OHMS
 INSULATION RESISTANCE: >10MEG OHMS
 WITHSTAND VOLTAGE: DC150V
 CURRENT RATING: 1A/DC100V
 OPERATING TEMPERATURE: -30°C TO +60°C
 ASSEMBLY TO BE INDIVIDUALLY PACKAGED IN A POLYBAG

RoHS Compliant ✓

UNLESS OTHERWISE SPECIFIED,
 DIMENSIONS ARE IN INCHES [mm]
 TOLERANCES TO BE: ANGLES ±2°
 .X ±.1 [2.5]
 .XX ±.01 [.25]
 .XXX ±.005 [.13]
 OVERALL CABLE LENGTH TOL:
 ≤ 60 [1524] +3 [76.2] / -0
 > 60 [1524] +5% / -0%



APPROVALS	DATE
DRAWN BY C.MCCORMICK	11/21/2002
CHECKED BY D.PARHAM	11/21/2002
APPROVED BY R.CARRICK	11/21/2002

CONFIGURATION DETAILS OF
 UNDIMENSIONED FEATURES
 MAY VARY

L-com CONNECTIVITY PRODUCTS		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845	
CATEGORY		COAXIAL	
PRODUCT DESCRIPTION		ADAPTR BNC M/DUAL BINDING POST	
SIZE A	FSCM NO. 43321	DWG. NO. BC2720	REV. C
SCALE: NONE		CAD FILE: BC2720.SLDDRW	SHEET 1 OF 1