
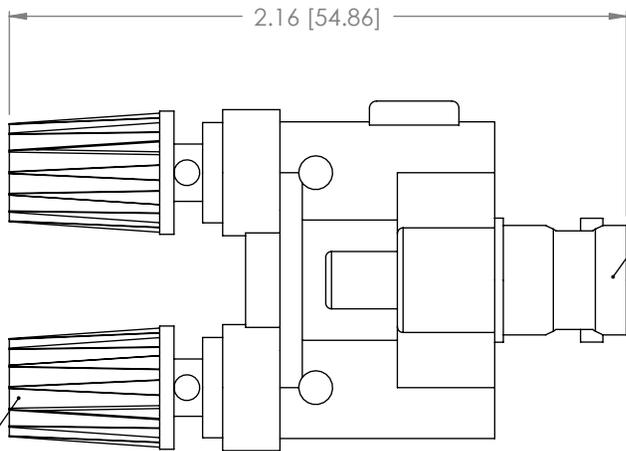


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

| REVISIONS | | | |
|-----------|-----------------------------|----------|------------|
| REV | DESCRIPTION | DATE | CHANGED BY |
| A | INITIAL RELEASE | 12/29/03 | MCCORMICK |
| B | ECN 3177: UPDATE DWG FORMAT | 1/29/08 | D.GRIFFIN |
| | | | |
| | | | |

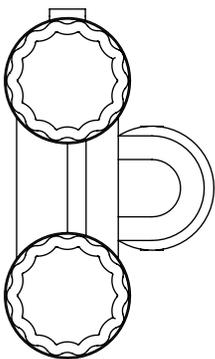

2X BINDING POST

BNC JACK

NOTES:

MATERIAL:

BODY: POLYETHYLENE
 PLUGS: COPPER
 CENTER CONTACT: COPPER
 INSULATOR: ACETAL

FINISH:

PLUGS: NICKEL PLATE
 BNC SHELL: NICKEL PLATE

MISCELLANEOUS:

CONTACT RESISTANCE: <20MEG OHMS
 INSULATION RESISTANCE: >10MEG OHMS
 WITHSTAND VOLTAGE: DC150V
 CURRENT RATING: 1A/DC100V
 OPERATING TEMPERATURE: -30°C TO 60°C
 ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN A POLYBAG

RoHS Compliant ✓

L-com
 CONNECTIVITY PRODUCTS
 45 BEECHWOOD DRIVE
 NORTH ANDOVER, MA
 01845

| | | | |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|---------------------------|--------------------------------------------------------------|
| UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] TOLERANCES TO BE: .X ±.1 [2.5] ANGLES ±2° .XX ±.01 [.25] .XXX ±.005 [.13] OVERALL CABLE LENGTH TOL: ≤ 60 [1524] +3 [76.2] / -0 > 60 [1524] +5% / -0% | APPROVALS | DATE | CATEGORY COAXIAL |
| | DRAWN BY C.MCCORMICK | 12/29/2003 | |
| PROJ | CHECKED BY D.PARHAM | 12/29/2003 | PRODUCT DESCRIPTION ADAPTR BNC F/DUAL BINDING POST |
| | APPROVED BY R.CARRICK | 12/29/2003 | |
| CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY | | | SIZE A |
| FSCM NO. 43321 | | DWG. NO. BC2730 | REV. B |
| SCALE: NONE CAD FILE: BC2730.SLDDRW | | | SHEET 1 OF 1 |