


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	10/10/11	D.GRIFFIN
B	ECN 8241: RELEASED TO SUZHOU, NEW FORMAT, UPDATE ROHS	2/2/16	S.LI

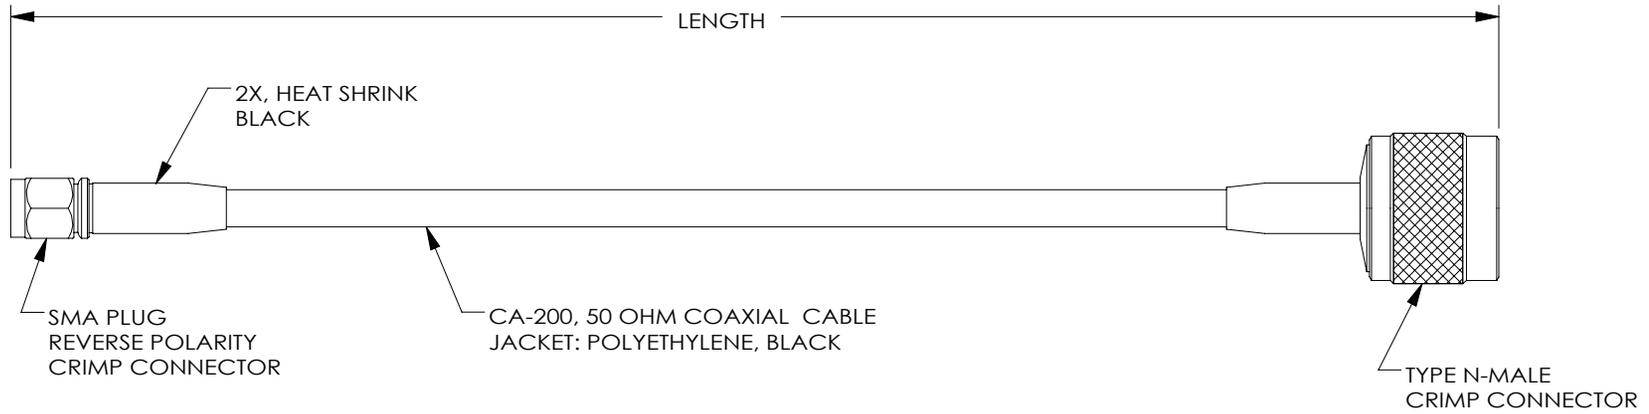

LENGTH CODE CHART		
CABLE# & LENGTH	LENGTH SYMBOL	EXAMPLES OF PART# USED
CA-RSPNMEXXX	WHERE XXX = LENGTH IN FEET	CA-RSPNME010 (10 FEET)
CA-RSPNMENXX	WHERE NXX = LENGTH IN INCHES	CA-RSPNMEN16 (16 INCHES)
CA-RSPNMEMXX	WHERE MXX = LENGTH IN METERS	CA-RSPNMEM07 (7 METERS)
CA-RSPNMEXMX	WHERE XMX = LENGTH IN DECIMAL METERS	CA-RSPNME3M5 (3.5 METERS)

**NOTES:**

1. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
2. CABLE ASSEMBLY SHALL RECEIVE INSERTION LOSS TEST PER L-COM SPECIFICATIONS.
3. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

**REGULATORY COMPLIANCE:**  
CE2011/65/EU (RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: $\leq 12$ [305] = +1 [25] / -0 $> 12$ [305] $\leq 60$ [1524] = +2 [51] / -0 $> 60$ [1524] $\leq 120$ [3048] = +4 [102] / -0 $> 120$ [3048] $\leq 300$ [7620] = +6 [152] / -0 $> 300$ [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = $\pm$ .2 [5.08] .XX = $\pm$ .02 [51] .XXX = $\pm$ .005 [13]	APPROVALS DRAWN BY D. CASTRO CHECKED BY D. PARHAM APPROVED BY K. BURGNER	DATE 10/7/11 10/7/11 10/7/11	45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845	
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY			CATEGORY <b>COAXIAL</b>
	PROJECTION 	COLOR VARIATIONS MAY OCCUR	SIZE <b>A</b>	FSCM NO. <b>43321</b>
	DWG. NO. <b>CA-RSPNME</b>		REV. <b>B</b>	SCALE: NONE CAD FILE: CA-RSPNME.SLDDRW SHEET 1 OF 1