


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	06/23/10	D.GRIFFIN
B	ECN 6626: UPD. CONNECTOR DESCRIPTIONS. ADDED INSERTION LOSS NOTE	1/16/13	D. DESJARDIN

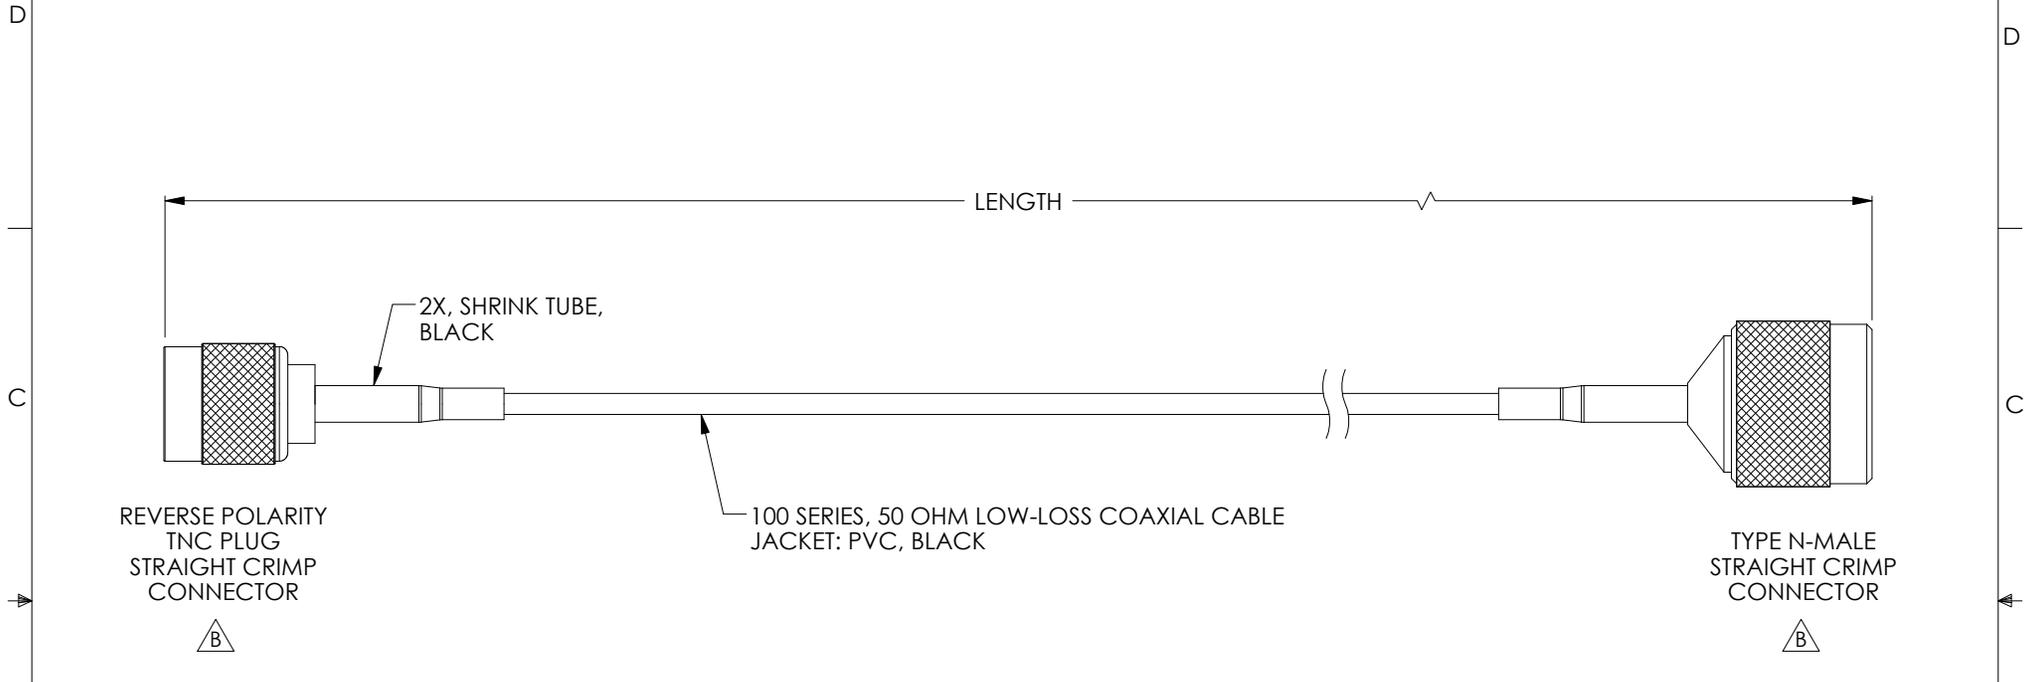

LENGTH CODE CHART		
CABLE# & LENGTH	LENGTH SYMBOL	EXAMPLES OF PART# USED
CA-RTPNMCXXX	WHERE XXX = LENGTH IN FEET	CA-RTPNMC010 (10 FEET)
CA-RTPNMCNXX	WHERE NXX = LENGTH IN INCHES	CA-RTPNMCN16 (16 INCHES)
CA-RTPNMCMMXX	WHERE MXX = LENGTH IN METERS	CA-RTPNMCMM07 (7 METERS)
CA-RTPNMCXMX	WHERE XMX = LENGTH IN DECIMAL METERS	CA-RTPNMC3M5 (3.5 METERS)

NOTES:

1. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
2. CABLE ASSEMBLY SHALL RECEIVE INSERTION LOSS TEST PER L-COM SPECIFICATIONS.
3. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0%	APPROVALS	DATE		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	DRAWN BY D. PARHAM	06/23/2010		CATEGORY COAXIAL
ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 .XX = ±.02 .XXX = ±.005	CHECKED BY D. FRISIELLO	06/23/2010	PRODUCT DESCRIPTION CA,CA100 RP-TNC P/N-MALE	
PROJECTION 	APPROVED BY K. BURGNER	06/23/2010	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	SCALE: NONE
COLOR VARIATIONS MAY OCCUR	SIZE A	FSCM NO. 43321	DWG. NO. CA-RTPNMC	REV. B
	CAD FILE: CA-RTPNMC.SLDDRW		SHEET 1 OF 1	