


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
E	ECN 3307: UPDATE DWG FORMAT	5/1/08	D.GRIFFIN
F	ECN 4101: CN RELEASE AND NEW FORMAT	8/3/09	D.FRISIELLO

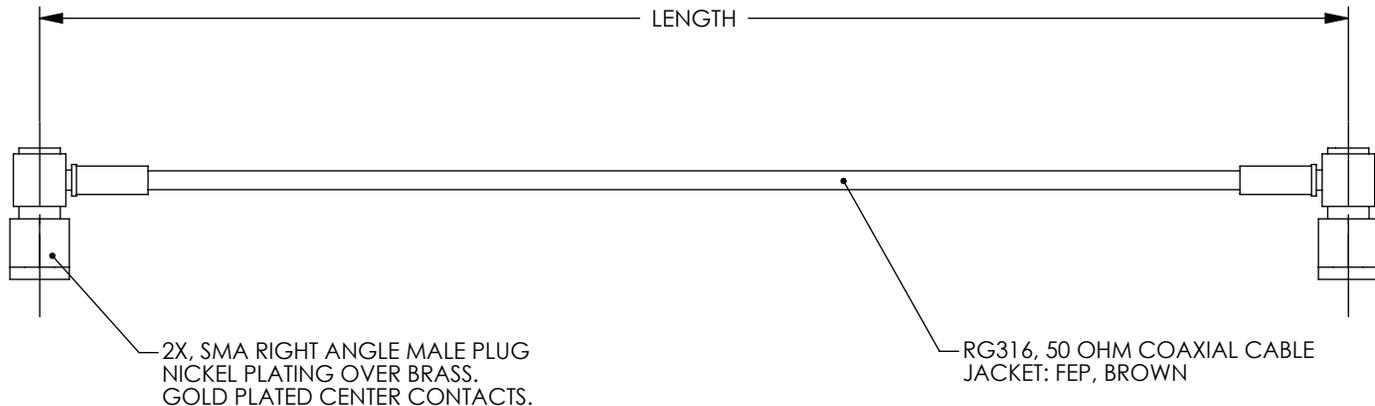

2X, SMA RIGHT ANGLE MALE PLUG
NICKEL PLATING OVER BRASS.
GOLD PLATED CENTER CONTACTS.


RG316, 50 OHM COAXIAL CABLE
JACKET: FEP, BROWN

MODEL #	LENGTH	
	FEET	METERS
CCSR316-1	1.0	0.30
CCSR316-1.5	1.5	0.46
CCSR316-2	2.0	0.61
CCSR316-2.5	2.5	0.76
CCSR316-3	3.0	0.91
CCSR316-4	4.0	1.22
CCSR316-5	5.0	1.52
CCSR316-7.5	7.5	2.29
CCSR316-10	10.0	3.05

RoHS Compliant ✓

NOTES:

- CABLE ASSEMBLY IS DESIGNED FOR HIGH TEMPERATURE APPLICATIONS (200° C).
- CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
- CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0%	APPROVALS	DATE	 45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	DRAWN BY C.MCCORMICK	05/08/2001	
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 .XX = ± .02 .XXX = ± .005	CHECKED BY D.PARHAM	05/08/2001	PRODUCT DESCRIPTION RIGHT ANGLE SMA TO RIGHT ANGLE SMA RG316
PROJECTION 	APPROVED BY R.CARRICK	05/08/2001	
SIZE A		FSCM NO. 43321	DWG. NO. CCSR316
SCALE: NONE		CAD FILE: CCSR316.SLDDRW	
			REV. F
			SHEET 1 OF 1