


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
C	ECN 5868: ADDED LENGTHS 03 M, 075 M, REVISED WIRE MAP	12/7/11	D.FRISIELLO
D	ECN5915: REVISED VIEWS OF USB MICRO B MALE	01/10/12	DFP
E	ECN6237: ADDED CONTACT PLATING NOTE, UPDATED FORMAT.	09/17/12	DFP
E	ECN 99999: UPDATE TO CORRECT ORIENTATION OF LOGO ON MICRO B END	1/13/16	S.LI

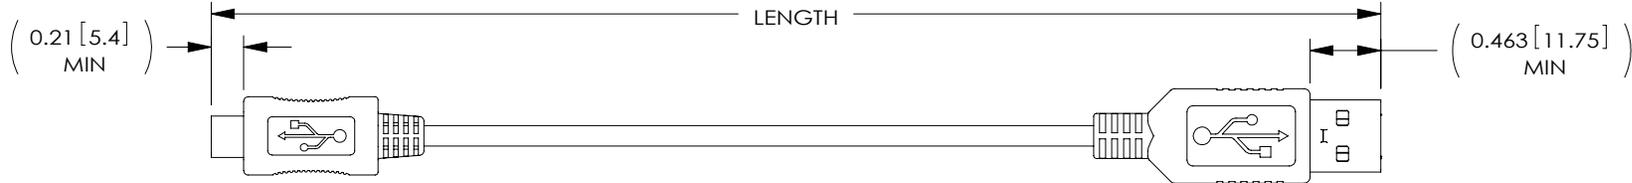


"P1"  
5-PIN MICRO B PLUG  
CONTACTS: 30 μINCHES  
GOLD PLATING

2X MOLDED HOOD  
AND STRAIN RELIEF  
PVC, BLACK

ONE 28AWG STRANDED TINNED COPPER TWISTED PAIR  
TWO 28AWG STRANDED TINNED COPPER CONDUCTORS  
OVERALL ALUMINIZED POLYESTER SHIELD WITH DRAIN WIRE  
PLUS TINNED COPPER BRAIDED SHIELD.  
PVC OUTER JACKET, BLACK

PIN 1  
DIELECTRIC  
"P2"  
SERIES "A" PLUG  
CONTACTS: 30 μINCHES  
GOLD PLATING

MODEL NUMBER	LENGTH METERS [FEET]
CSMUAMICB-03M	0.3 [.98]
CSMUAMICB-05M	0.5 [1.64]
CSMUAMICB-075M	0.75 [2.46]
CSMUAMICB-1M	1.0 [3.28]
CSMUAMICB-2M	2.0 [6.56]
CSMUAMICB-3M	3.0 [9.84]

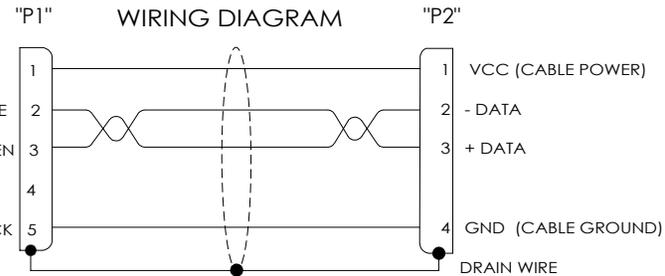

NOTES:

1. CABLE ASSEMBLY SHALL HAVE 360° SHIELD TERMINATION.
2. CABLE ASSEMBLY SHALL MEET USB 2.0 REQUIREMENTS.
3. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
4. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

**REGULATORY COMPLIANCE:**  
CE2011/65/EU (RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] ≤+1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0%	APPROVALS	DATE		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	DRAWN BY D. PARHAM	06/03/2010		CATEGORY
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5.08] .XX = ± .02 [51] .XXX = ±.005 [13]	CHECKED BY D. CASTRO	06/03/2010	PRODUCT DESCRIPTION	
PROJECTION	APPROVED BY S. SMITH	06/03/2010	CBL, USB-A/MICRO B	
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR	SIZE <b>A</b>	FSCM NO. <b>43321</b>
			DWG. NO. CSMUAMICB	REV. <b>E</b>
			SCALE: NONE	CAD FILE: CSMUAMICB.SLDDRW
				SHEET 1 OF 1