



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
D	ECN 99999: UPDATE TO CORRECT ORIENTATION OF LOGO ON MINI B END	1/13/16	S.LI
E	ECN 12112: UPDATE CONTACT FINISH FOR MINI FEMALE END	10/13/2022	R.CARLESCO

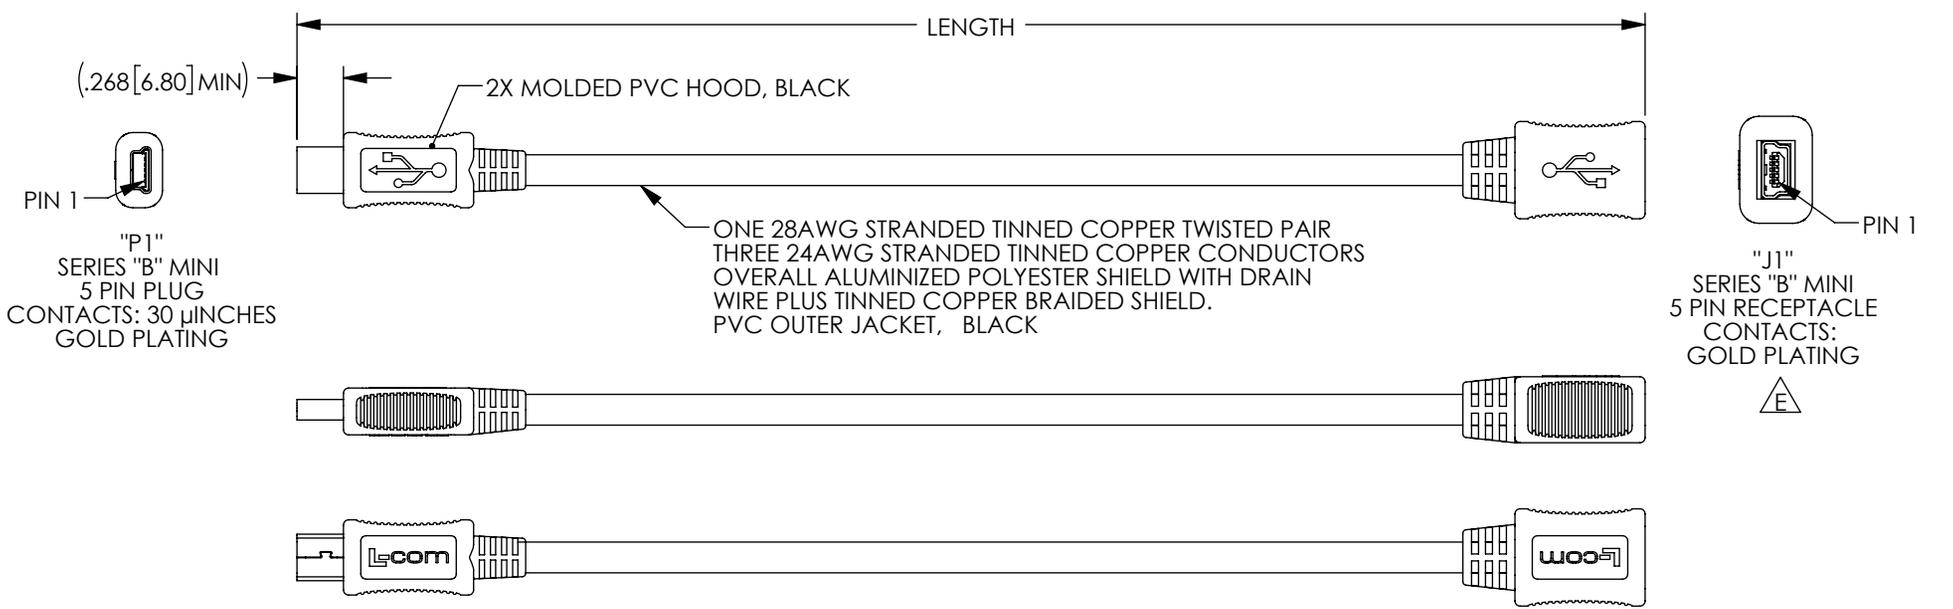


"P1"
SERIES "B" MINI
5 PIN PLUG
CONTACTS: 30 μINCHES
GOLD PLATING

"J1"
SERIES "B" MINI
5 PIN RECEPTACLE
CONTACTS:
GOLD PLATING

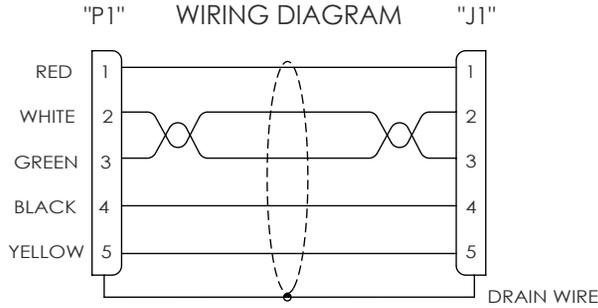

PART NUMBER	LENGTH	
	FEET	METERS
CSMUMB5X-03M	.98	0.3
CSMUMB5X-05M	1.64	0.5
CSMUMB5X-075M	2.46	0.75
CSMUMB5X-1M	3.28	1.0
CSMUMB5X-2M	6.56	2.0
CSMUMB5X-3M	9.84	3.0

- NOTES:
1. CABLE ASSEMBLY SHALL HAVE 360° SHIELD TERMINATION.
 2. CABLE ASSEMBLY SHALL MEET USB 2.0 REQUIREMENTS.
 3. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
 4. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCES: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0 ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5] FRACTIONS ± 1/32 .XX = ± .02 [.5] ANGLES ± 1° .XXX = ± .005 [.13]	APPROVALS D. CASTRO CHECKED BY D.FRISIELLO APPROVED BY S.SMITH	DATE 3/30/09 4/21/09 4/21/09	 an INFINITO brand 50 High Street, West Mill, North Andover, MA 01845 USA. Phone: 1.800.341.5266 1.978.682.6936			
	CATEGORY USB	PRODUCT DESCRIPTION CA USB MB5 M/F EXT				
THIRD-ANGLE PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR	SIZE A	CAGE CODE 43321	DWG. NO. CSMUMB5X	REV. E
SCALE: NONE		CAD FILE: CSMUMB5X.SLDDRW		SHEET 1 OF 1		