
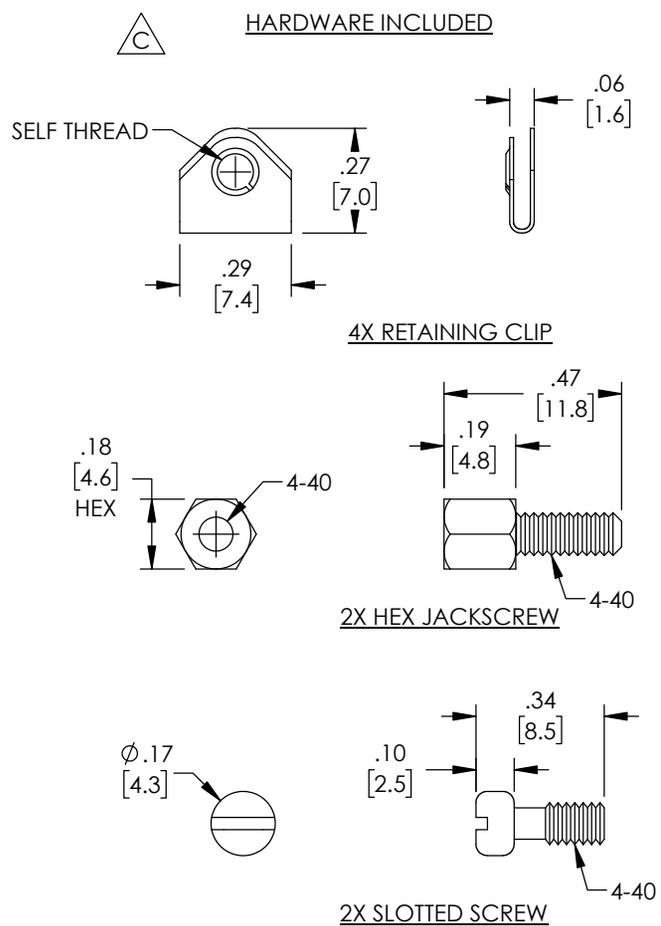


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	01/09/2003	MCCORMICK
B	ECN 5091: ADDED PACKAGING NOTE, ROHS STAMP, UPDATED FORMAT	10/19/2010	DFF
C	ECN 10590: REVISED 3D MODEL AND DRAWING	08/13/2020	BGATES

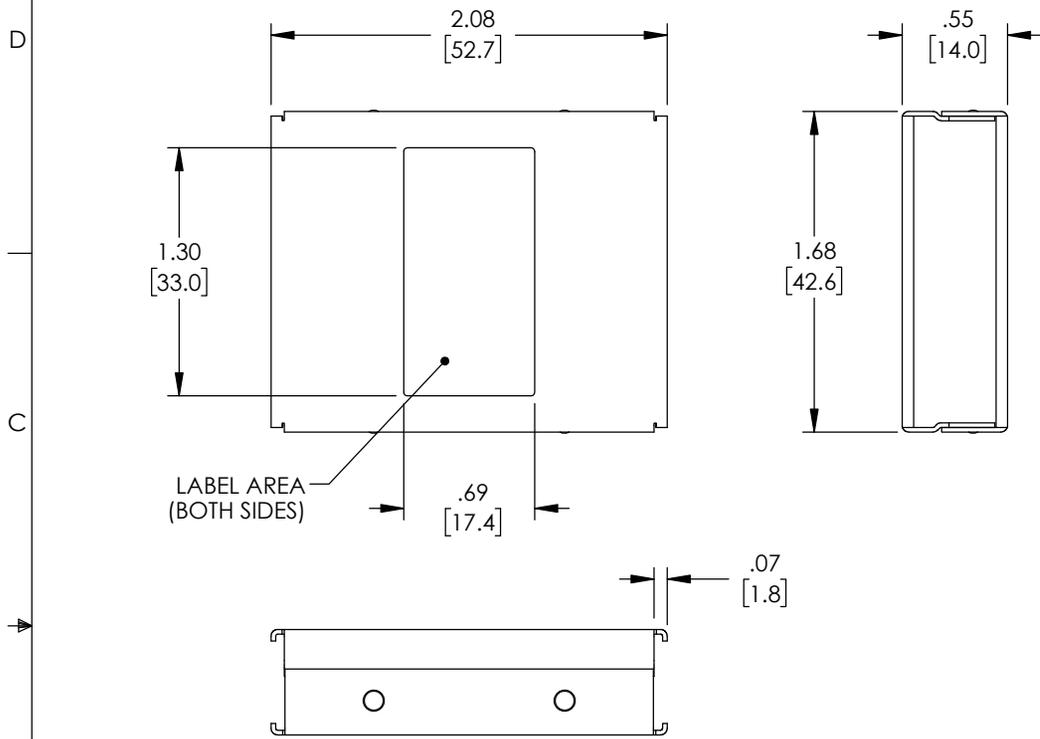

- NOTES:
1. MATERIAL: COLD ROLLED STEEL 0.024" THK
  2. FINISH: BRIGHT CHROME PLATE
  3. ALL DIMENSIONS ARE FOR REFERENCE ONLY.
  4. CONNECTOR HARDWARE SUPPLIED:  
TWO #4 JACKSCREWS  
TWO #4 SLOTTED SCREWS  
FOUR RETAINING CLIPS  
TWO #4 HEX NUT ( NOT SHOWN)
  5. FOR USE WITH STANDARD DB25 OR HD44 D-SUBMINIATURE CONNECTORS
  6. COVER KIT IS INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0 ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5]   FRACTIONS ± 1/32 .XX = ± .02 [5]   ANGLES ± 1° .XXX = ± .005 [13]	APPROVALS	DATE	 50 High Street, West Mill, North Andover, MA 01845 USA. Phone: 1.800.341.5266 1.978.682.6936
	DRAWN BY DFRISIELLO	08/13/2020	
THIRD-ANGLE PROJECTION 	CHECKED BY BGATES	08/13/2020	CATEGORY <b>D-SUBMINIATURE</b>  PRODUCT DESCRIPTION <b>ADPT COVER DB25 SHIELDED MTL</b>
	APPROVED BY BGATES	08/13/2020	
CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR	SIZE <b>A</b>   CAGE CODE <b>43321</b>   ITEM NO. <b>DHS25</b>	SCALE: NONE   CAD FILE: DHS25.SLDDRW   SHEET 1 OF 1