
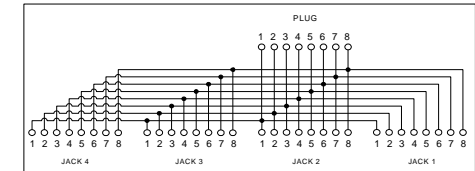
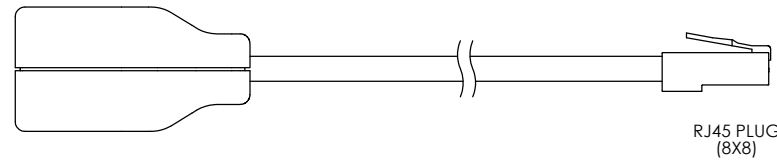

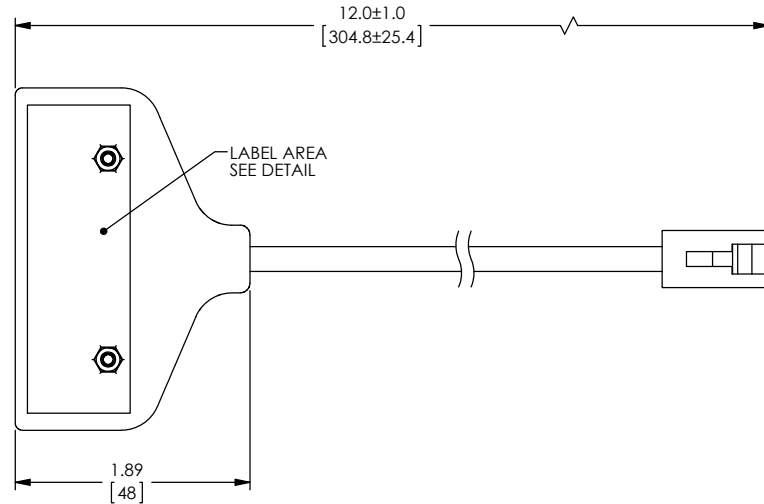


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTIONS IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	CHANGED BY
E	ECN 7232-REMOVED GOLD PLATE VALUE	1/16/14	D.FRISIELLO

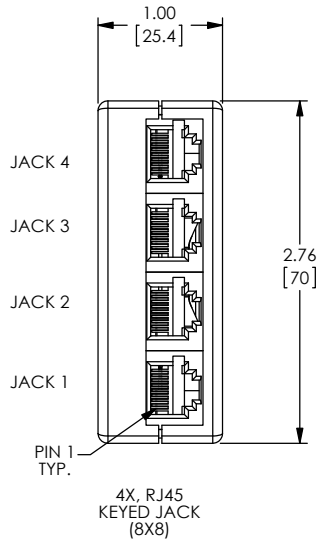

LABEL DETAIL
AND WIRING DIAGRAM

NOTES:

MATERIALS:
PLUG: POLYCARBONATE, UL94V-1
CONTACTS: PHOSPHOR BRONZE WITH GOLD PLATE .
ON CONTACT SURFACES.
JACKS HOUSING: ABS PLASTIC, DARK GRAY, UL94V-0.
HOUSING FINISH: #27 CHARMMILES.
CONTACTS: PHOSPHOR BRONZE WITH GOLD PLATE .
ON CONTACT SURFACES.


CABLE: UNSHIELDED CATEGORY 3 OR BETTER
4 TWISTED PAIRS, 24 AWG STRANDED COPPER
UL LISTED COMMUNICATION CABLE, TYPE CM
JACKET: PVC, GRAY

ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.

CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.


CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN
ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:
CE2011/65/EU(RoHS DIRECTIVE)

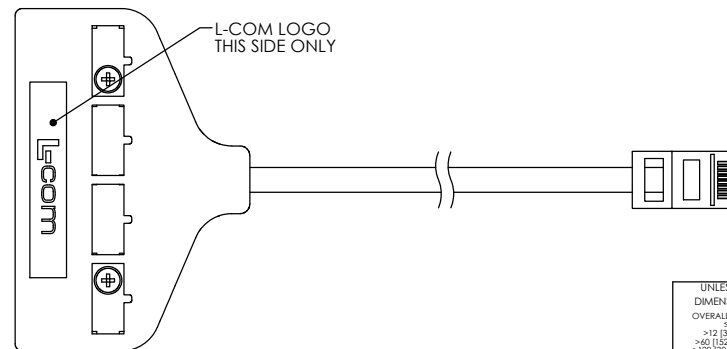

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES (mm)	
OVERALL CABLE LENGTH TOLERANCE: ≤12 (305) ±.1 (25) / -0 >12 (305) ≤60 (1524) = +.2 (51) / -0 >60 (1524) ≤120 (3048) = +.4 (102) / -0 >120 (3048) ≤300 (7620) = +.6 (152) / -0 >300 (7620) = +.8 (203) / -0	
ALL OTHER DIMENSIONAL TOLERANCES: X = ±.2 (5.08) XX = ±.02 (5.1) XXX = ±.005 (1.3)	
PROJECTION	

APPROVALS	DATE
DRAWN BY D. PARIKH	9/3/2003
CHECKED BY T. CLARK	9/18/2003
APPROVED BY C. MCCORMICK	9/18/2003
CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	
COLOR VARIATIONS MAY OCCUR	

		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845	
CATEGORY TELECOM/MODULAR			
PRODUCT DESCRIPTION USOC 8X8 PLUG TO (4) 8X8 JACKS			
SIZE B	FSCM NO. 43321	DWG. NO. ECS404-12	REV. E
SCALE: 1:1.5 CAD FILE: FSCM404-12.SLDRAW		SHEET 1 OF 1	