

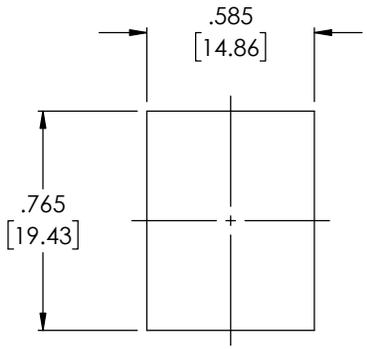


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.



| REVISIONS | | | |
|-----------|---|------------|------------|
| REV | DESCRIPTION | DATE | APPROVED |
| A | INITIAL RELEASE | 02/18/2009 | DFP |
| B | ECN 9684: UPDATED ADAPTER MODEL | 02/07/2019 | DFRISIELLO |
| C | ECN 9970: ADD RECOMMENDED PANEL CUTOUT VIEW | 07/18/2019 | DGUTTADAUR |

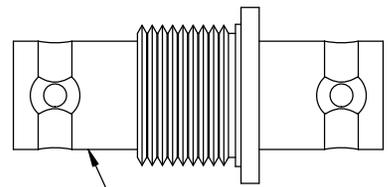


 RECOMMENDED PANEL CUTOUT

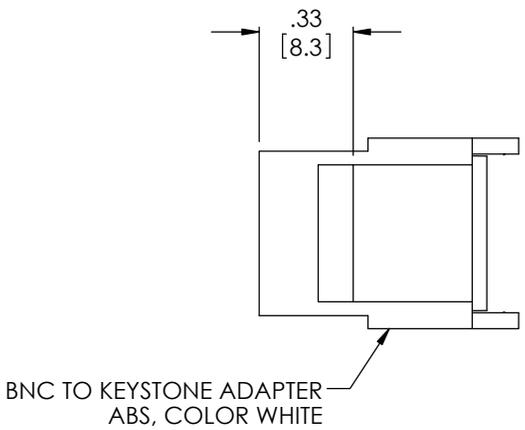

BNC JACK TO BNC JACK
BULKHEAD ADAPTOR
BODY: NICKEL PLATED BRASS
CONTACTS: GOLD PLATED BRASS
DIELECTRIC: ACETAL
IMPEDANCE: 75Ω

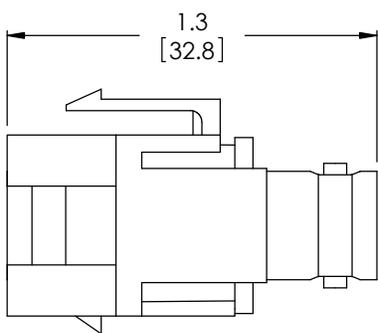

- NOTE
1. COUPLER SHIPPED ASSEMBLED
 2. COUPLER INDIVIDUALLY PACKAGED IN A POLYBAG
 3. TOP VIEW SHOWN WITH PARTS SEPARATED FOR CLARITY

| | | | | | | |
|--|---|--|--|-----------------------------|---------------------------|------------------|
| UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5.08] .XX = ± .02 [51] .XXX = ±.005 [13] | APPROVALS D.PARHAM CHECKED BY DFRISIELLO APPROVED BY DFRISIELLO | DATE 10/13/2008 02/18/2009 02/18/2009 |  50 HIGH STREET NORTH ANDOVER, MA 01845 | | | |
| | CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY | | | CATEGORY TELECOM/MODULAR | | |
| | PROJECTION  | COLOR VARIATIONS MAY OCCUR | SIZE A | FSCM NO. 43321 | DWG. NO. MJSCPBNC75-WT | REV. C |
| | SCALE: NONE | | CAD FILE: MJSCPBNC75-WT.SLDDRW | | SHEET 1 OF 1 | |