

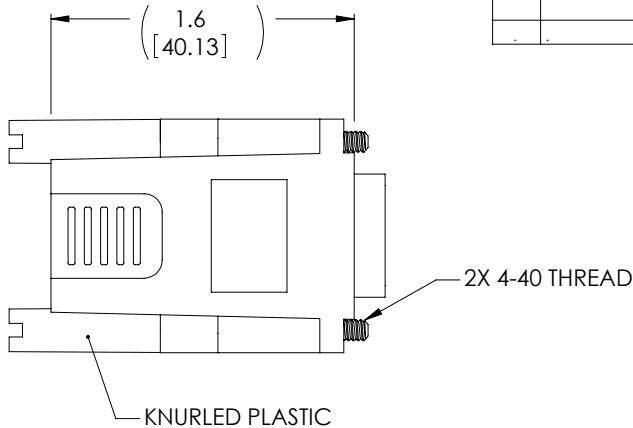


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	DRAWING REPLACES REC096FD-OD1	10/15/14	D. CASTRO

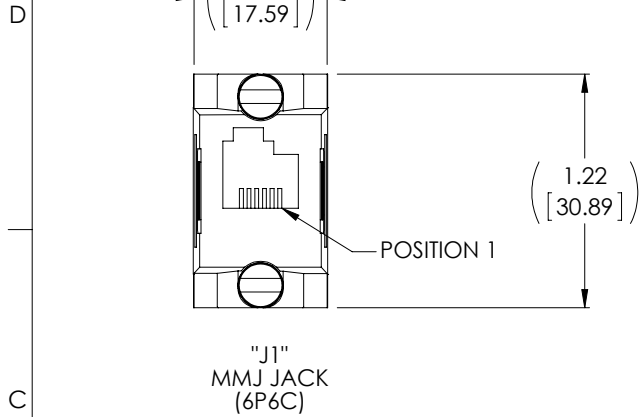

WIRE MAP	
"J1"	COLOR
PIN 1	WHITE OR GRAY
PIN 2	BLACK
PIN 3	RED
PIN 4	GREEN
PIN 5	YELLOW
PIN 6	BLUE

#### SPECIFICATIONS:

MOLDED PARTS ARE UL94V-0 RATED

#### MATERIAL:

HOUSING: MOLDED ABS  
COLOR: DARK GRAY

#### D-SUB:

INSULATOR: UL94V-0 THERMOPLASTIC  
CONTACTS: GOLD PLATED  
SHELL: TIN FINISH

#### RJ45:

CONTACTS: GOLD PLATED, 50 μINCHES

#### MISCELLANEOUS:


ADAPTOR KIT PROGRAMMED AS NEEDED  
BY INSERTING AND SEATING EACH PIN INTO  
DESIRED POSITION IN D-SUB CONNECTOR.

ADAPTER KIT SHALL BE INDIVIDUALLY PACKAGED UN-ASSEMBLED  
IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

ALL DIMENSIONS ARE FOR REFERENCE ONLY

#### REGULATORY COMPLIANCE:

CE2011/65/EU(RoHS DIRECTIVE)

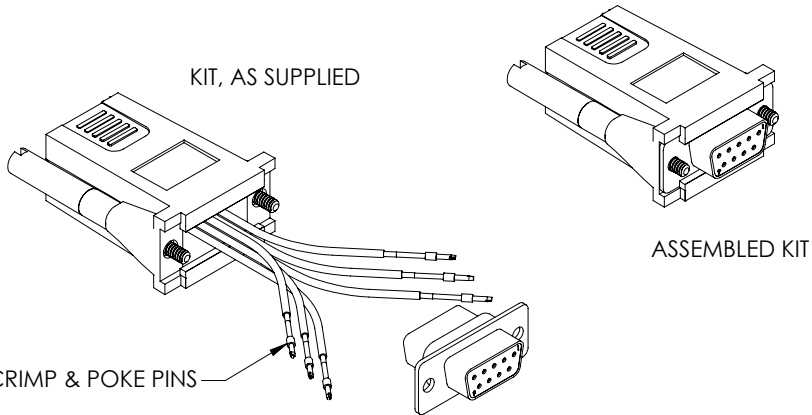

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 [5.08] .XX = ±.02 [51] .XXX = ±.005 [13] PROJECTION 	APPROVALS	DATE	 45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845	
	DRAWN BY TJC	12/14/01		
	CHECKED BY DJP	12/14/01	CATEGORY TELECOM/MODULAR	
	APPROVED BY CM	12/14/01	PRODUCT DESCRIPTION ADAPTOR KIT, DB9F/MMJ JACK	
CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		COLOR VARIATIONS MAY OCCUR	SIZE A	FSCM NO. 43321
			DWG. NO. REC096FD	REV. A
		SCALE: NONE	CAD FILE: REC096FD.SLDDRW	SHEET 1 OF 1