


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
D	ECN999999:REMOVED PACKAGE IN POLYBAG NOTE	11/10/08	D.GRIFFIN
E	ECN 7890: UPDATED FORMAT, PACKAGING, ROHS	4/2/15	D_DESJARDIN

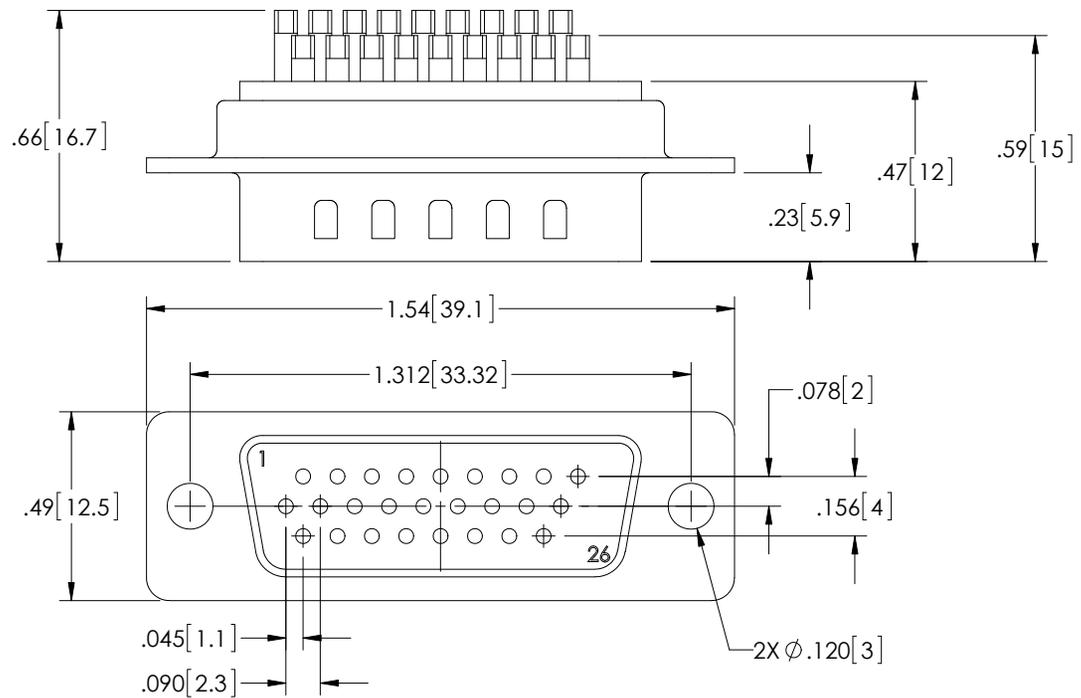

NOTES:

MATERIAL:

CONNECTOR SHELL: STEEL
 CONTACTS: BRASS
 CONNECTOR INSULATOR: THERMOPLASTIC, UL94V-0 RATED

FINISH:

CONTACTS: GOLD FLASH IN CONTACT AREA OVER NICKEL
 FRONT SHELL: NICKEL PLATED OVER COPPER
 REAR SHELL: TIN PLATED OVER COPPER
 SOLDER CUPS: TIN PLATED OVER NICKEL

ELECTRICAL:

CURRENT RATING: 1 AMP MAX
 DIELECTRIC WITHSTANDING: 500 Vac FOR 1 MINUTE
 INSULATION RESISTANCE: 1000 MΩ MIN @500 VDC
 CONTACT RESISTANCE: 30 mΩ MAX

MISCELLANEOUS:

OPERATING TEMPERATURE RANGE: -55°C TO +105°C
 PACKAGE IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

PART NUMBER	PACKAGING
SDH26P	1/BAG
SDH26P-TRAY	70/TRAY

REGULATORY COMPLIANCE:
 CE2011/65/EU (RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 [5.08] .XX = ±.02 [51] .XXX = ±.005 [1.27] PROJECTION 	APPROVALS	DATE
	B.MAZEJKA	11/10/2003
	CHECKED BY C.McCORMICK	12/08/2003
	APPROVED BY D.PARHAM	12/08/2003
CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR	REF

	45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845	
	CATEGORY D-SUBMINIATURE	
PRODUCT DESCRIPTION HDB26M SOLDER CUP CONNECTOR		
SIZE A	FSCM NO. 43321	DWG. NO. SDH26P
SCALE: NONE	CAD FILE: SDH26P.SLDDRW	SHEET 1 OF 1

D
C
B
A

D
C
B
A

8 7 6 5 4 3 2 1

8 7 6 5 4 3 2 1