
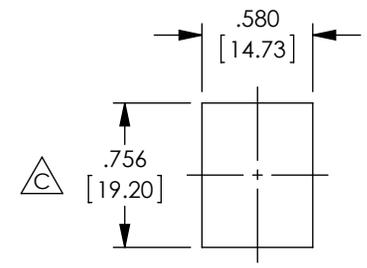
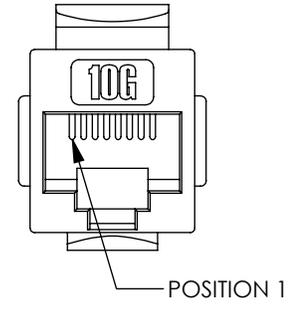
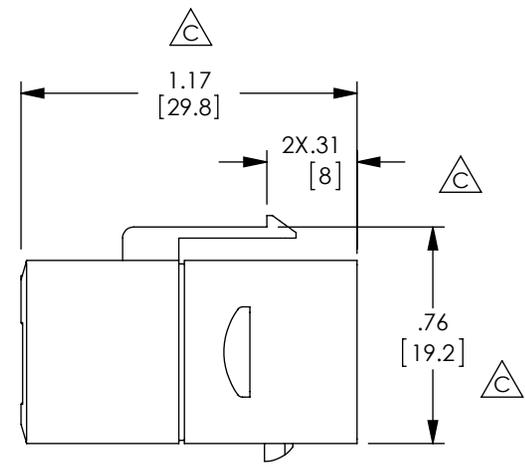


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	5/18/11	D.GRIFFIN
B	ECN 6881: REVISED PANEL OPENING. UPDATED MODEL, DIMS, NOTES.	6/13/13	D. DESJARDIN
C	ECN 7409: UPDATED PER NEW SUPPLIER SPEC	5/19/14	D. CASTRO

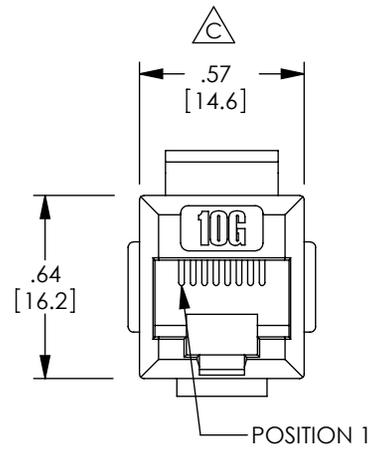

**NOTES:**

**MATERIAL:**  
 HOUSING: PC UL94V-0  
 COLOR: BLACK.  
 CONTACTS: PHOSPHOR BRONZE, 50 μINCHES GOLD PLATE

**ELECTRICAL:**  
 DC CURRENT RATING: 1.5 AMP  
 DIELECTRIC WITHSTANDING VOLTAGE: 1000 VOLTS AC.

**MISCELLANEOUS:**  
 WIRING: STRAIGHT THROUGH  
 OPERATING TEMPERATURE RANGE: -10°C TO +60°C.  
 APPLICATION: CATEGORY 6A.  
 PANEL THICKNESS: .06" [1.6mm] MAX.

COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

ALL DIMENSIONS ARE FOR REFERENCE ONLY.

**REGULATORY COMPLIANCE:**  
 CE2011/65/EU (RoHS DIRECTIVE)

RECOMMENDED PANEL OPENING

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5.08] .XX = ± .02 [5.1] .XXX = ±.005 [1.3]	APPROVALS DRAWN BY D. CASTRO CHECKED BY D. PARHAM APPROVED BY D. GALLAGHER	DATE 5/3/11 5/3/11 5/18/11	45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845	
	CATEGORY TELECOM/MODULAR			PRODUCT DESCRIPTION CAT 6A KEYSTONE FEED-THRU CPLR
PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR	SCALE: NONE CAD FILE: TDG1026KC6A.SLDDRW SHEET 1 OF 1	
SIZE <b>A</b>		FSCM NO. <b>43321</b>	DWG. NO. TDG1026KC6A	REV. <b>C</b>

