


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.


RoHS Compliant ✓

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	2/1/11	D.GRIFFIN
-	-	-	-

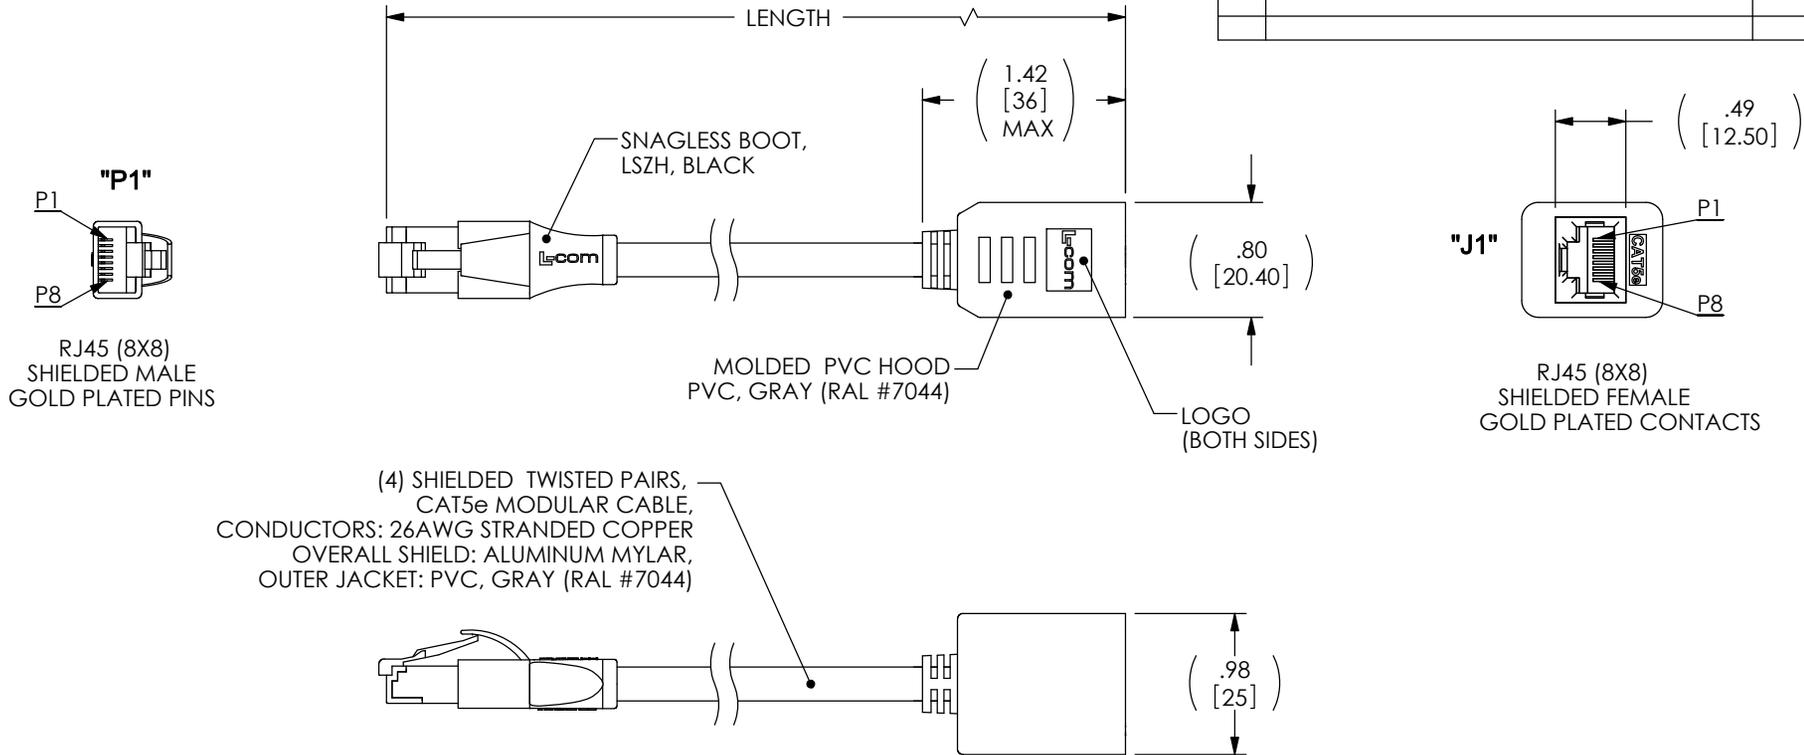

(4) SHIELDED TWISTED PAIRS, CAT5e MODULAR CABLE, CONDUCTORS: 26AWG STRANDED COPPER, OVERALL SHIELD: ALUMINUM MYLAR, OUTER JACKET: PVC, GRAY (RAL #7044)

WIRING MAP

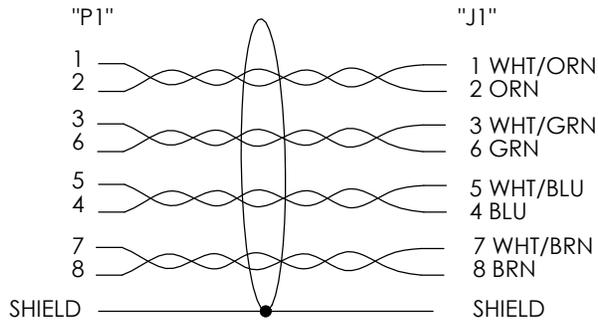

PART NUMBER	LENGTH	
	FEET	[METERS]
TRDC5EXTS-3	3.0	[.91]
TRDC5EXTS-5	5.0	[1.52]
TRDC5EXTS-7	7.0	[2.13]
TRDC5EXTS-10	10.0	[3.05]
TRDC5EXTS-15	15.0	[4.57]
TRDC5EXTS-25	25.0	[7.62]

NOTES:

1. MODULAR CONNECTOR TO MEET TIA-1096.
2. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
3. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPEC. PS-0031.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0%	APPROVALS	DATE	 45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	DRAWN BY D. CASTRO	1/25/11	
ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 .XX = ±.02 .XXX = ±.005	CHECKED BY D. PARHAM	1/26/11	CATEGORY TELECOM/MODULAR
	APPROVED BY D. GALLAGHER	1/31/11	PRODUCT DESCRIPTION CA C5E RJ45 M/F NON-FLANGED EXTENSION SHLD
PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR	SIZE A FSCM NO. 43321 DWG. NO. TRDC5EXTS REV. A
REF	SCALE: NONE	CAD FILE: TRDC5EXTS.SLDRW	SHEET 1 OF 1